


Shelf Assemblies

Shelf Assemblies:

- Includes:
 - 1 Multi-Function Front Beam
 - 1 Multi-Function Back Beam
 - 1 Multi-Function Shelf:
 - Particleboard or Wiregrid
 - Number of Shelf Supports requested (See load chart)
- Available in two types: (load capacity per pair of Beams with appropriate Shelf Supports)
 - Regular Duty: 1,600 - 3,000 lb.
 - Heavy Duty: 3,000 lb. max.
- For pricing see section 600, pg 4-14

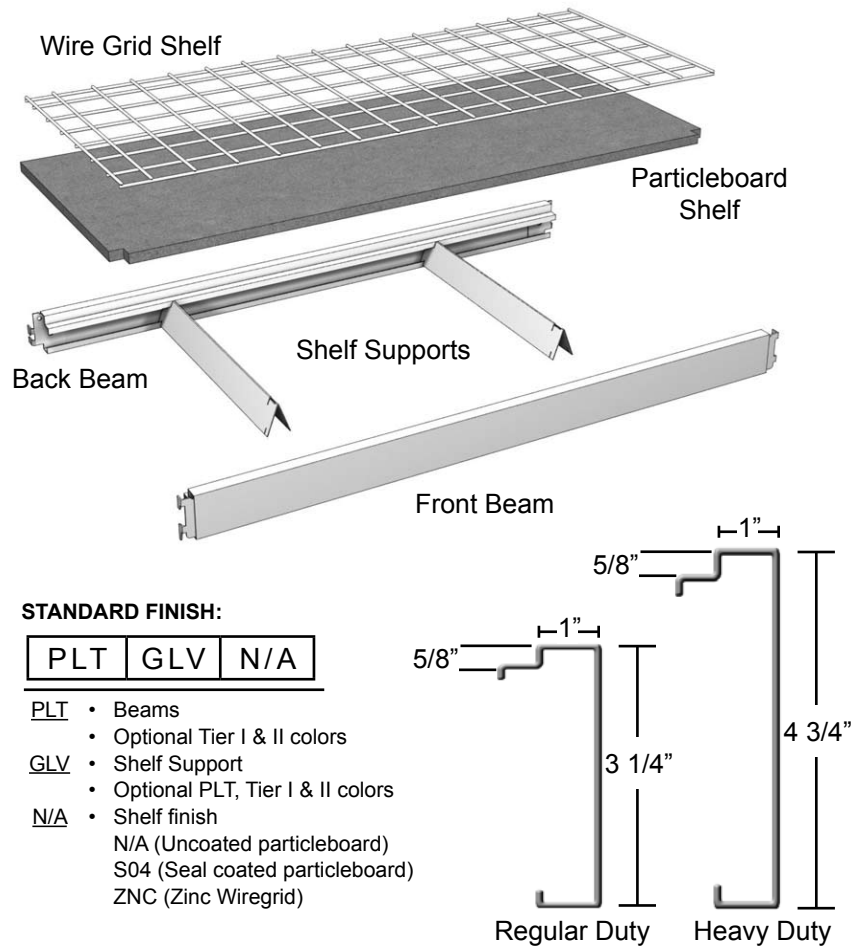

EXAMPLE PART NO.

MF	SA	22	96	2	RD
----	----	----	----	---	----

- MF = Multi-Function
 SA = "SA" Particleboard Shelf
 "WA" for Wiregrid Shelf
 22 = Shelf Depth: 13", 16", 19", 22", 25", 28", 31"
 96 = Section Width: 36", 48", 72", 84", 96"
 2 = Number of Shelf Supports: 2, 3, 4
 RD = "RD" Regular Duty Beam & Shelf Supports
 "HD" Heavy Duty Beam & Shelf Supports

STANDARD FINISH:

PLT	GLV	N/A
-----	-----	-----

- PLT • Beams
 • Optional Tier I & II colors
 GLV • Shelf Support
 • Optional PLT, Tier I & II colors
 N/A • Shelf finish
 N/A (Uncoated particleboard)
 S04 (Seal coated particleboard)
 ZNC (Zinc Wiregrid)

Multi-Function Shelf Capacity (Uniformly Distributed Load)						
Shelf Depth	Section Width (Beam Length)	Number of Regular Duty Shelf Supports with Regular Duty Beams			Number of Heavy Duty Shelf Supports with Heavy Duty Beams	
		2	3	4	2	3
Up to 31" Deep	36"	1,600	2,400	3,000	3,000	---
	48"	1,600	2,400	3,000	3,000	---
	72"	1,600	2,000	2,400	---	3,000
	84"	1,600	1,800	2,000	---	3,000
	96"	1,600	1,600	1,600	---	3,000

Front/Back Beams

EXAMPLE PART NO.

MF	FB	48	
----	----	----	--

- MF = Multi-Function
 FB = "FB" Front Beam
 "BB" Back Beam
 48 = Section Width: 36", 48", 72", 84", 96"
 HD = Add "HD" if Heavy Duty Beams needed (must be used with "HD" Shelf Supports)

STANDARD FINISH:

PLT

- Optional Tier I & II colors

EXAMPLE PART NO.

MFWSS	16	
-------	----	--

- MFWSS = Multi-Function Shelf Support
 16 = Base Deck Depth: 13", 16", 19", 22", 25", 28", 31"
 HD = Add "HD" if Heavy Duty Shelf Supports needed (must be used with "HD" Beams)

STANDARD FINISH:

GLV

- Galvanized
- Optional Tier I & II colors