


# Widespan Uprights

## Upright Frame

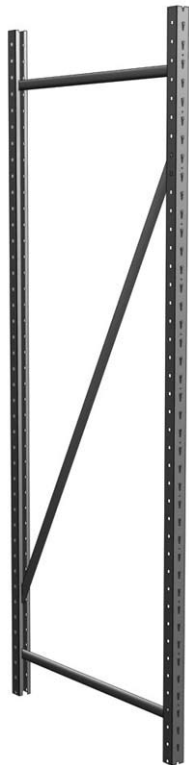


One Piece Upright

### Upright Frame:

- Upright post slotted on face, allow shelf adjustment 2" on center
- Square holes punched on sides of Upright post for accessories
- Accessory holes on face of Upright punched 6" on center also aid beam placement
- Top Caps included on each Upright
- One Frame required for each section, plus one at end of each run
- One-piece Uprights from 48" - 120"
- Two-piece Uprights over 120" (Upright Connectors included)
- Floor Anchors, Floor Protectors, or Back to Back Connectors may be ordered (pg 705)
- Uniformly distributed load of 10,000 lb. (per Upright frame at 48" max. Beam spacing, vertically)
- Add "SPC" to part number for additional packaging to provide increased protection under harsh shipping conditions
- **For pricing see section 700, pg 1-4**

## Upright Connector



### Upright Connector:

- Used to extend new or existing Upright Frames
- Included with: two-piece Upright Frames (132" - 192")
- Two Connectors required per Upright Frame (front & rear)
- **For pricing see section 700, pg 9**

### EXAMPLE PART NO.

WSU	18	048		
-----	----	-----	--	--

WSU = Widespan Upright

18 = Depth: 18", 24", 30", 36", 42", 48"

048 = Height: 48", 60", 72", 84", 96", 120"

Options:

RE = Reinforced Upright for hand loader/  
stacker applications

SPC = Additional packaging

### STANDARD FINISH:

PLT
-----

- Optional Tier I & II colors

### STANDARD FINISH:

PART NO.
WSUC

GLV
-----

- Galvanized

## Two Piece Upright

### EXAMPLE PART NO.

WSU	18	144			U
-----	----	-----	--	--	---

WSU = Widespan Upright

18 = Depth: 18", 24", 30", 36", 42", 48"

144 = Height: 132", 144", 156", 168", 192"

Options:

RE = Reinforced Upright for hand loader/  
stacker applications

SPC = Additional packaging

U = Unit

(two Upright Frames & two WSUC.GLV)

### STANDARD FINISH:

PLT
-----

- Optional Tier I & II colors

## Reinforced Upright Frame

### Reinforced Upright Frames:

- "RE" Frame available in 72" - 120"H & all depths (lower Frame only on 132" - 192")
- For use with hand loader/stacker
- Reduces chance for frame damage
- Channel welded inside each post in lower 48"
- Welded foot plate for anchoring - 7/16" hole
- **For pricing see section 700, pg 5-8**

