

Upright Frames

Cube Saver® Upright Frames:

- Upright Post slotted on face, allow shelf adjustment 2" on center
- Square holes punched on sides of Upright post for accessories
- Accessory holes on face of Upright punched 6" on center also aid beam placement
- Top Caps included on each Upright
- One Frame required for each section, plus one at end of each run
- One-piece Uprights from 72" - 120"; (for taller Uprights contact Marketing)
- Welded Footplate for anchoring: 7/16" hole
- Back to Back Connectors may be required (pg 705)
- Uniformly distributed load of 10,000 lb.
(per Upright frame at 48" max. vertical Beam spacing)
- **For pricing see section 700, pg 27**



EXAMPLE PART NO.

CSU	12	084
-----	----	-----

STANDARD FINISH:

PLT

CSU = Cube Saver® Upright

12 = Section Depth: 12", 18", 24", 30"


084 = Height: 72", 84", 96", 108", 120"

- Optional Tier I & II colors

Low Profile Storage Shelves:

- Heavy Duty only:
- Reinforced with 1 1/4"D x 3/4"H Galvanized steel channels
- 5/8" Industrial grade particleboard shelf
- Shelf surface is seal coated for durability & stain resistance
- Uniformly distributed load of 600 lb. per shelf
- Adjustable in 2" vertical increments
- Four Shelf Clips included with each shelf
- **For pricing see section 700, pg 27**

Low Profile Storage Shelves

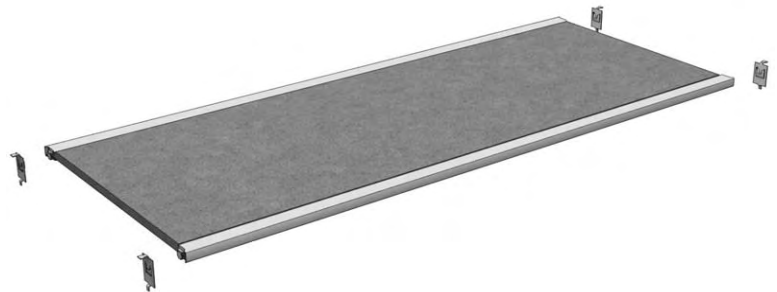

EXAMPLE PART NO.

CSSS	4	12	H
------	---	----	---

STANDARD FINISH:

GLV

CSSS = Cube Saver® Low Profile Storage Shelf

4 = Section Width: 3' or 4'

12 = Section Depth:
12", 18", 24", 30"

H = Heavy Duty only

- Galvanized

Shelf Clip



Cube Saver® Shelf Clips:

- Four clips required per Low Profile Storage Shelf
- Heavy Duty Storage Shelf only
- Locks shelf into Upright
- Heavy gauge steel
- **For pricing see section 700, pg 27**

PART NO.

CSSC

STANDARD FINISH:

GLV

- Galvanized