


S Series Storage Shelving Unit Assemblies

Storage Shelving Sections

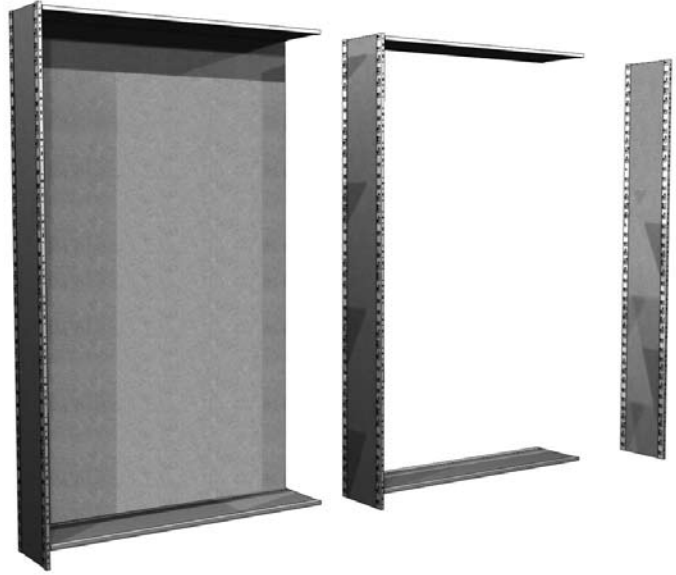

Storage Shelving Sections:

- Open (Pat. # 6,085,918) or Closed Uprites
- Includes top & bottom Shelf (two Shelves per section)
- Additional Shelves ordered separately (pg 806)
- One end Uprite Assembly required to finish each continuous run; including single sections
- Crossbrace or Closed Back sections should be ordered based on specifications (pg 805)
- Crossbraces & Back also can be ordered separately (pg 805)
- **For pricing see section 800, pg 1-14**

EXAMPLE PART NO.

SS	N	XR	4	12	84	R
----	---	----	---	----	----	---

- SS** = S Series Storage Section
N = "N" Open or "P" Closed Uprites
XR = Lateral Stabilization:
 "XR" Regular Duty Crossbrace:
 1200 lb per section (48"- 96"H only),
 "XH" Heavy Duty Crossbrace:
 2400 lb per section (72"- 144"H only),
 "B" Back Panel: 2400 lb per section,
 "N" No brace: (see diagram pg 805 for bracing guidelines)
4 = Section Width: 3' or 4'
12 = Shelf Depth: 12", 18", 24", 30"
84 = Section Height: 48", 60", 72",
 84", 96", 108", 120", 144"
R = "R" Regular Duty Shelves
 "H" Heavy Duty Shelves
 "WG" Wiregrid Shelves

STANDARD FINISH:

GLV	GLV
-----	-----

- GLV** • Uprite & Shelf
GLV • Crossbrace
 • N/A for Backs
 • Leave blank for no brace

Assembled Uprite



Assembled Uprite:

- Galvanized steel posts
- Two Styles:
 Open: Galvanized steel Uprite braces (Pat. # 6,085,918)
 Closed: 5/8" unfinished particleboard panel
- Shelf lances 2" on center
- One assembly required for each 3' or 4' Section & one at the end of each run
- **For pricing see section 800, pg 15**

EXAMPLE PART NO.

SSU	12	048	N
-----	----	-----	---

STANDARD FINISH:

GLV

- SSU** = S Series Storage Uprite
12 = Shelf Depth: 12", 18", 24", 30"
048 = Section Height: 48", 60", 72", 84", 96", 108", 120", 144"
N = "N" Open or "P" Closed