


S Series Components

Back-to-Back Screw

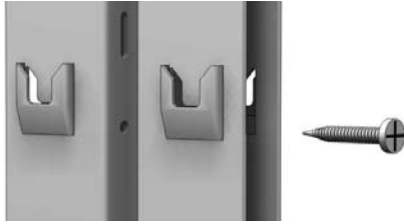

Back-to-Back Screw:

- #8 x 3/4" Phillips head sheet Metal screws
- Connect two Open Uprite Assemblies through pilot holes punched in Uprite post face creating double-entry Island
- **For pricing see section 800, pg 18**

ASSEMBLY HEIGHT	# OF SCREWS OR CONNECTORS REQUIRED
36" - 72"	2
84" - 108"	3
120" - 144"	4

PART NO.	STANDARD FINISH:
SS2221	N/A

Back-to-Back Connector




Back-to-Back Connector:

- Connect Closed Uprite assemblies in Storage Shelving runs, creating double-entry Island
- Screws included
- **For pricing see section 800, pg 18**

PART NO.	STANDARD FINISH:
SS1311	GLV

Floor Protector/Shim




PART NO.	STANDARD FINISH:
SSFS	GLV

Floor Protector/Shim:

- 1/16" thick steel pad
- Level Storage Shelving Uprites on uneven floors
- Protect floor from scratching
- **For pricing see section 800, pg 18**

Floor Anchor



PART NO.	STANDARD FINISH:
WS1241	GLV

Floor Anchor:

- Heavy gauge steel
- Angle fastens Uprite assembly to floor
- Required:
 1. Where bottom Shelf is NOT within 6" of floor
 2. On runs when height-to-depth ratio exceeds 6 to 1
 3. To meet seismic anchoring specifications
- Includes Uprite mounting screw
- **For pricing see section 800, pg 18**

Uprite Connector



PART NO.	STANDARD FINISH:
SSUC	GLV

Uprite Connector:

- Connect two Uprite assemblies to increase unit height
- Shelves CANNOT be installed at same location as connectors
- 7 1/2" long
- **For pricing see section 800, pg 18**